



Perfetto 230



Modern floodlight designed especially for LED COB light sources. It can rotate up to 350° with respect to the vertical axis and pivot up to 90° upwards.

Materials: body and component compartment in polyester painted die-cast aluminum. Reflectors in polycarbonate with mirror finish

Installation: for electrical track, wall mounting, ceiling mounting

Accessories: reflector for beam angle regulation

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Light source power	19W
Voltage rating	230 V
Light source included	Yes
Luminaire power	19 W
Type of LED	COB

MECHANICAL DATA

Housing material	Die cast aluminum
------------------	-------------------

INFORMATION

Rotated model	Yes
---------------	-----

AVAILABE VARIANTS

Product code	Light source power [W]	Type of installation	Colour
IV742-161-16	1×19	for tracks	Black
IV742-161-21	1×19	for tracks	White
IV742-161-52	1×19	for tracks	Grey
IV742-121-16	1×19	Ceiling mounted	Black
IV742-121-21	1×19	Ceiling mounted	White
IV742-121-52	1×19	Ceiling mounted	Grey


CERTIFICATES

Degree of protection (IP)	IP20
Class of protection	I
Energy class	A+
CE	Yes
ENEC	Yes

LIGHT DATA

Light source luminous flux	2000 lm
Colour temperature	3000K
Light distribution	DI
Beam angle	38

PERFETTO 230
SZYNA 3-FAZOWA 3-PHASE TRACKS

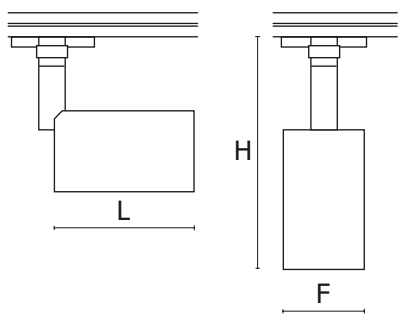


DIMENSIONS

Product code	Length [mm]	H [mm]	F [mm]
IV742-161-16	131	188	84
IV742-161-21	131	188	84
IV742-161-52	131	188	84
IV742-121-16	131	206	84
IV742-121-21	131	206	84
IV742-121-52	131	206	84

Length = Length | H = Height / Depth | F = Outer diameter

PERFETTO 230
PODSTAWA DO SUFITU BASE

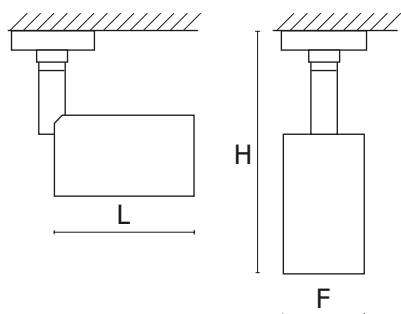

ACCESSORIES

Optical element



Kep Kyclos Perfetto Reflector

IV28-3138

60°

IV28-3141

70°