



**401016 HYDROTECH MEDIUM 02 ROUND PRO LED**



Round up&down luminaire for outdoor installation on a façade/wall. Phosphochromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with 2 x 5 CREE XP-L LED. IP65 rating.

**Energy Label** A++

- Material: high corrosion resistance die-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 5 CREE "XP-L" LED up and NR. 5 CREE "XP-L" LED down.
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws.
- Silicone rubber gasket.
- Tempered safety glass.
- M20 rubber grommet Rutaseal® in EPDM
- Adjustable +/- 15 degrees.

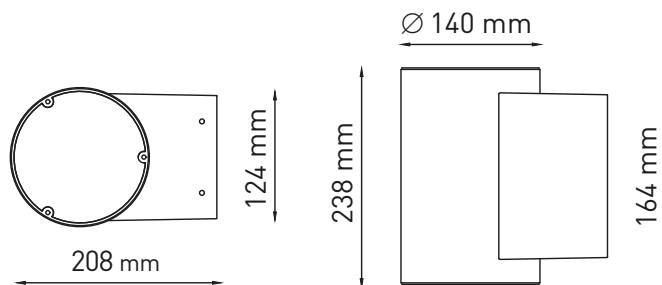

	LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
2X14 WATT 220-240V 50-60HZ ELECTRONIC IP65 3.00 KG UNIT GROSS WEIGHT	HIGH-POWER LED	3.000°K WARM-WHITE	10°	2 X 1.300	92.86	■ TEXTURED GREY □ MATT WHITE (ON REQUEST) ■ MATT BLACK (ON REQUEST)
			30°	2 X 1.230	87.86	
			45°	2 X 1.170	83.57	

\* OTHER LIGHT COLORS AVAILABLE ON REQUEST: ○ 4.000°K NEUTRAL-WHITE